

1037005

537 005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
9 June 2005 (09.06.2005)

PCT

(10) International Publication Number  
WO 2005/051185 A1

(51) International Patent Classification<sup>7</sup>: A61B 5/00,  
5/0488, 17/42

(21) International Application Number:  
PCT/IT2004/000602

(22) International Filing Date:  
3 November 2004 (03.11.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
FI2003A000298 25 November 2003 (25.11.2003) IT

(71) Applicant and

(72) Inventor: BELLI, Pierfrancesco [IT/IT]; Via San Gallo,  
78, I-50129 Firenze (IT).

(74) Agent: MARTINI, Lazzaro; Studio Brevetti ing.Dr.Laz-  
zaro Martini S.r.L., Via dei Rustici 5, I-50122 Firenze (IT).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,

CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.


(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE,  
SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATIC APPARATUS FOR CONTROLLING THE CHILDBIRTH LABOUR

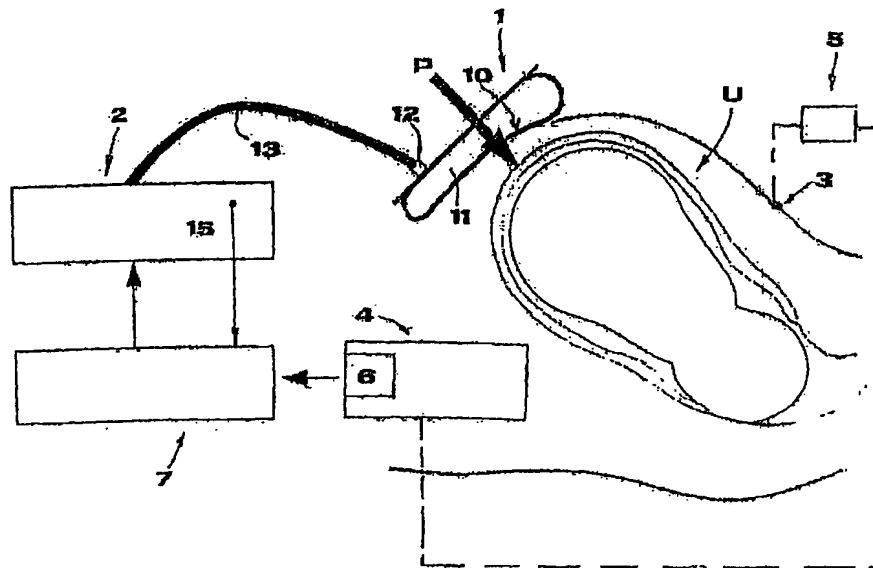

(57) Abstract: Apparatus for controlling the childbirth labour comprising: an electromyographic unit (4) with sensors (3) associated therewith for detecting the electrical signals of a parturient's uterus and means (6) for analysing and processing said electrical signals, and a pneumatic belt (1) to be fixed around the parturient's abdomen and having sensors (15) associated therewith to detect the variation of the internal pressure due to uterine contractions, and means (2) for inflating said belt to provide a thrust as an aid for the expulsion of the fetus, characterized in that a device (7) is provided, associated with said sensors (15) and (3), to control the activation of said means (2) for the inflation of the pneumatic belt (1).

BEST AVAILABLE COPY

WO 2005/051185 A1

# "AUTOMATIC APPARATUS FOR CONTROLLING THE CHILDBIRTH LABOUR"

## SPECIFICATION

The present invention refers to an automatic apparatus for  
5 controlling the childbirth labour.

It is known that the term "childbirth labour" refers to the complex of mechanical and dynamic phenomena which lead to the expulsion of the fetus and placenta and which, conventionally, is subdivided into three stages:

10 - the first stage, which relates to the dilatant period, that is, to the beginning of the labour up to the complete dilatation of the uterine cervix, is in turn subdivided into a "latent period", characterized by a dilatation of 3-4 cm, and a following "active period" which leads to a complete  
15 dilatation;

- the second stage, which relates to the expulsive period, goes from the complete dilatation to the delivery;

- the third stage, which relates to the discharge of the after-birth, ends up with the expulsion of the placenta.

20 It is also known that the deficiency, alteration or insufficient coordination of the uterine contractions may cause problems upon the expulsive stage, which is the delivery's most delicate one. In particular, it may happen that the uterus is not able to produce, with its  
25 contractions, a force of an intensity sufficient to conclude the delivery's expulsive stage (hypokinesia). It may happen, besides, that the expectant mother, in spite of the therapies commonly provided for treating such cases, is unable to produce a thrust - through a corresponding contraction of the  
30 abdominal press - adding up to the force generated by the uterine contraction. And, since a prolonged rest of the fetus in the delivery duct may seriously endanger the health

condition thereof, a so-called Kristeller manoeuvre is generally performed by the health personnel, which consists in exerting, with an arm, a series of thrusts upon the bottom of the uterus, with the purpose of assisting the natural  
5 expulsive forces and speeding up the progression and disengagement of the fetus. However, this manoeuvre has risks inasmuch as it may cause the rupture of the uterus, the detachment of the placenta and acute fetal pains as well.

Also known in obstetrics is the use of the electromyograph  
10 (EMG) by which it is possible to register the electrical phenomena of the uterus' natural and involuntary contractions by deriving the relevant electrical potentials via electrodes applied on the patient's abdomen: an application software to be run on a PC provides for a graph of said electrical  
15 potentials versus time. However, the use of only an EMG does not provide any aid to the parturient's thrust and, moreover, the contraction graphs plot also other spurious signals such as spikes, tensions induced by the activation of other apparatuses and by neon glow lamps.

Also known in obstetrics is the use of the Pressure Labor Assister (PLA), with pressure sensors-controlled software, which utilizes the pressure increase inside an air chamber - formed within an abdominal band fixed around the patient's body - and which occurs as a consequence of the natural  
25 uterine contractions, to provide an automatic extra force, as an aid to the parturient, for the expulsion of the future baby.

On the other hand, this known device PLA does not provide a chart nor a record of the uterine contractions, and may also  
30 be a source of dangers, inasmuch as the possible overpressures on the pneumatic band, which are independent of the contractions but are due instead, for example, to more or

less involuntary movements of the parturient, are always interpreted as a signal of uterine contraction and, in such case, it may occur that the consequent inflation of the abdominal pneumatic band will take place during a rest  
5 period, between one contraction and another, thereby dangerously reducing the inflow of blood to both the parturient and future baby.

One object of the present invention is to overcome the drawbacks of the common and widespread Kristeller technique.

10 A further object of the present invention is to enable, in case of ascertained insufficient expulsive force of the uterine natural contractions, the person in charge of the childbirth to activate a device providing an extra thrust for the expulsion of the fetus - the activation of said device  
15 depending, for a higher safety measure, on the uterine contraction and not on false signals.

This result has been achieved, according to the invention, by adopting the idea of making an apparatus having the characteristics disclosed in the independent claims. Further  
20 characteristics being set forth in the dependent claims.

The advantages deriving from the present invention lie essentially in the fact that it is possible to automatically ensure, whenever the need arises and in a non-invasive fashion, the highest accurate coordination between the  
25 internal thrust produced by both natural and involuntary uterine contractions and the supplementary thrust produced by means of a pneumatic belt intended to act on the parturient's abdomen; that an apparatus according to the invention is safe, utilizable with relative simplicity by the personnel  
30 assisting the expectant mothers, relatively simple to make and reliable also after a prolonged service period. All this by making use of an integrated system allowing the auxiliary

pneumatic thrust to be obtained only when the parturient has contractions detected simultaneously and safely by both pneumatic and electrical signals independent from each other and deriving from said contractions.

5 These and other advantages and characteristics of the invention will be best understood by anyone skilled in the art from a reading of the following description in conjunction with the attached drawings given as a practical exemplification of the invention, but not to be considered in  
10 a limitative sense, wherein:

- Fig. 1 is a simplified block diagram of an apparatus according to the invention, showing a possible configuration thereof upon use;

- Fig. 2 is a schematic plan view of the pneumatic belt (1)  
15 shown in the schematic diagram of Fig. 1;

- Fig. 3 is a further simplified block diagram of an apparatus according to the invention.

Reduced to its basic structure, and reference being made to the figures of the attached drawings, an apparatus for  
20 controlling the childbirth labour, according to the invention, comprises:

- means for detecting the electrical activity of the uterus, comprising two or more outer electromiographic sensors (3) (that is, sensors of non-invasive type) able to be positioned  
25 on the skin of the parturient's abdomen at two regions corresponding to preset points of the uterus U;

- means for registering and plotting the electrical signals of the uterine contractions thus detected;

- means (4, 5) for analysing said electrical signals in  
30 relation to a predetermined scheme of analysis;

- an inflatable belt (1) associated with pneumatic means (2) able to inflate it under control and at preset pressure, and

respectively deflate it: the said belt (1) being put on by the expectant mother in such a way that a surface (10) of the same belt will act, when inflated, upon the bottom of the uterus;

5 - means (7) to control the activation and deactivation of said pneumatic means (2) in response to the pressure variation due to the contraction and sensed by the pneumatic belt, and to the result of analysis of the uterus' electrical activity.

10 In particular, the said analysis means comprise an electromyographic apparatus (4), associated with said sensors (3) via an interface (5) allowing the amplification and pre-processing of the signals and provided with a section (6) for processing the signals detected by the sensors (3) and  
15 transmitted through the interface (5) with their respective time value, as best described later on in greater details.

In case of two-channel electromyographic apparatuses, such as the TECA Sinergy Multimedia of the Oxford Instruments, two channel sensors or electrodes and one ground electrode are  
20 used: the channel sensors are positioned simmetrically and horizontally in a skin region of the parturient's abdomen at about 5-15 cm of the umbilical transverse, and the ground electrode is located on the internal side of the left thigh.

As for the said inflatable belt (1), this is of a type  
25 comprising an air chamber (11) with a coupling (12) for a tube (13) connectable to said means (2), and provided with two wings (14) of a length sufficient for being tied up around the parturient's thorax: the said wings (14) being able to be linked one to the other by "velcro"-type means  
30 after the belt has put on. Moreover, the pneumatic means (2) is internally provided with sensors (15) able to detect the pressure variations inside the air chamber (11), which are

due to the thrusts exerted by the parturient's abdomen as a consequence of the uterine contractions, that is, relative to a basic pressure value corresponding to the initial inflation (for example, when using a belt of MITECH-200-A type, a basic  
5 value of 8-16 kPa). The belt in question is intended to exert, as best described later on, a predetermined pressure P uniformly distributed on the uterus' bottom.

Provided upstream of said pneumatic means (2) is an activation device (7) which, in turn, is associated with  
10 sensors (15) located within the means (2), and with the electromyographic apparatus (4): said device (7) determining the activation of the pneumatic means (2), that is, the inflation of the belt (1), whenever both the uterine contraction signals on output from the sensors (15) and the  
15 signals on output from the apparatus (4) are present therein at the same time.

To be more precise, if, during the labour, the device (7) receives simultaneously both the electrical signals from the means (4) - resulting of such intensity and shape as to  
20 correspond to those of the uterine contractions (for example, electrical signals three times higher than the signals sensed between one contraction and another) - and the pneumatic signals detected by the sensors (15) and identified as contraction signals as well, then, only in this case the said  
25 device (7) gives the command for the activation of the means (2), that is, for the inflation of the belt (1) at a pressure to be either preset or timely established by the person in charge of the childbirth.

In other words, the activation of belt (1) and, accordingly,  
30 the auxiliary thrust P exerted by the latter on the parturient's abdomen in correspondence of the uterus' bottom, takes place solely when there is occur, simultaneously, on

the one hand, an overpressure in the chamber (11) of belt (1) due to a deformation imposed by the abdominal muscles on the belt's wall because of a contraction and, on the other hand, that is, in correspondence of sensors (3), a myoelectrical activity of preset intensity and in any case exceeding the intensity being present when no contractions occur. The two detections are independent from each other, as being obtained from independent detection means, but are both related to a same event, that is, to the natural and involuntary uterine contraction upon the active stage of the childbirth. It thus follows that the actuation of the belt (1) results precisely in phase with the uterine contractions of greater intensity, as it is operated on the basis of detections made both within the chamber (11) of belt (1) and on the basis of detections made on the muscular electrical activity in the more directly involved abdominal region.

The time for the activation of belt (1), that is, the time of overpressure persistence within the chamber (11) of the same belt under control of means (2), is adjustable by the health operator who assists the expectant mother and whose decisions are taken according to the trend of the electromyographic contraction signals previously registered for the same patient.

As above described, the device (7) which controls the activation of the means (2) provided for the inflation of the belt (1) is commonly associated with the pressure sensors (15) and with the electrical sensors (3) as well. However, the operator may cut off one or the other connection, owing to a malfunction of one of them or when he/she deems suited to do so.

For example, it is possible to exclude the connection with the pressure sensors (15) so that the activation of the



pneumatic means (2) be controlled solely by electrical signals transmitted by the sensors (3); otherwise, it is possible to cut off the sensors (3), so that the activation of the pneumatic means (2) be controlled solely by pressure signals transmitted by the sensors (15). All this makes it possible to use the device in question also in case of malfunctions affecting either the detection of pressure signals through the sensors (15) or the detection of signals transmitted by the sensors (3), and to process the signals by means of the electromyographic apparatus (4, 6).

In any case, the operator has faculty of excluding the automatic intervention of the system in order to use the latter only when the need arises.

With reference to the diagram of Fig. 3, the said device (7) comprises an AND gate (70) whose inputs are connected, respectively, to the output of the apparatus (4) and to the output of an A/D converter (150) provided downstream of sensors (15) housed in the belt (1). The output of said AND gate is connected with the input of a D/A converter (72) which, on output, is connected with the means (2) which activate the inflation of the belt (1). Inserted on the line connecting the gate (70) with the converter (72) is a normally closed switch (71). Inserted on the line connecting the converter (150) with the converter (72) is a normally opened switch (73). When the sensors (15) sense an overpressure in the chamber of belt (1), a corresponding electrical signal is produced which, after being converted in digital form by the converter (150), is fed to the AND gate (70). Similarly, the signals on output from the section (6) of the electromyographic apparatus (4) come to the AND gate (70) which, when both signals are present, activates, through the converter (72), the opening of a solenoid of means (2)

and, therefore, the inflation of the belt (1). The operator may decide to cut off the AND gate (70), for example in case of ascertained failure of the apparatus (4), by merely opening the switch (71) and closing the switch (73). The  
5 switches (71) and (73) operate in push-pull mode.

The said data processing section (6) can advantageously consist of a PC associated with the electromyographic unit (4). Within the section (6), the signals coming from the sensors (3) and acquired by the system are processed  
10 according to a preset algorithm, for example, the one described in the article "A fast algorithm for detecting contractions in uterine electromyography - a non invasive method utilizing higher-order zero crossing for signal analysis" published in IEE Engineering and Biology -  
15 March/April 2000. Such an algorithm allows the obtainment of an estimator value to be compared with a predefined threshold. Throughout the time interval in which the estimator value exceeds said threshold, it is assumed that a contraction is taking place and a signal of logic level one  
20 is fed to the AND gate (70). Vice versa, when the estimator value is below said threshold value, a signal of logic level zero is fed to the AND gate (70).

## CLAIMS

1) Apparatus for controlling the childbirth labour comprising:

- an electromyographic unit (4) with sensors (3) associated therewith for detecting the electrical signals of a parturient's uterus and means (6) for analysing and processing said electrical signals, and


- a pneumatic belt (1) to be fixed around the parturient's abdomen and having sensors (15) associated therewith to detect the variation of the internal pressure due to uterine contractions, and means (2) for inflating said belt to provide a thrust as an aid for the expulsion of the fetus, characterized in that a device (7) is provided associated with said sensors (15) and (3) to control the activation of said means (2) for the inflation of the pneumatic belt (1).

2) Apparatus according to claim 1, characterized in that the said device (7) comprises an AND gate (70) with its inputs being connected, respectively, to the output of said electromyographic unit (4) and to the output of an A/D converter (150) located downstream of said sensors (15) which are housed in the belt (1), and with its output being connected with the input of a D/A converter (72) whose output is connected with said means (2) for the inflation of the belt (1).

3) Apparatus according to claim 2, characterized in that a first switch (71) is inserted on the line connecting the gate (70) with the converter (72).

4) Apparatus according to claims 2 and 3, characterized in that a second switch (73) is inserted on the line connecting the converter (150) with the converter (72), said second switch operating in push-pull mode with respect to said first switch.

5) Apparatus according to claim 1, characterized in that the said means (6) of the electromyographic unit (4) consist of a PC associated with the electromyographic unit (4).

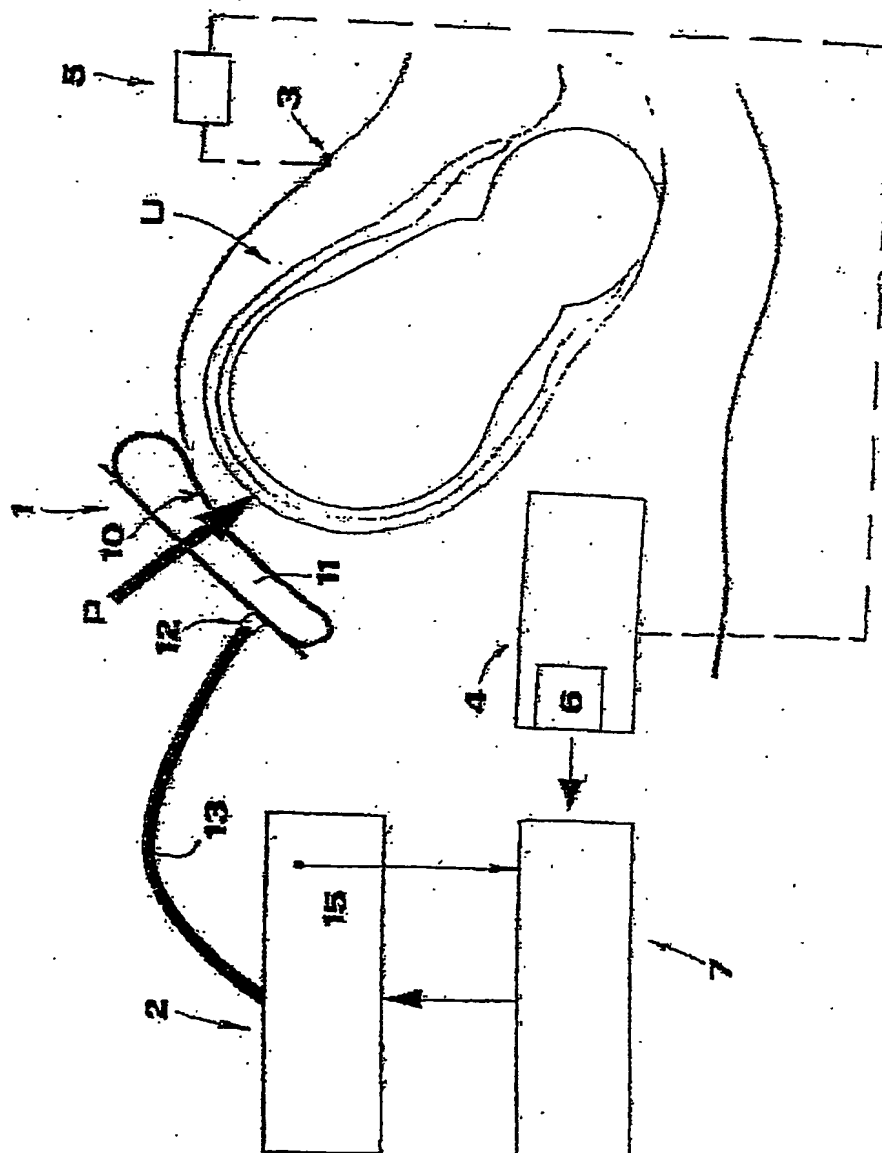

**Fig. 1**

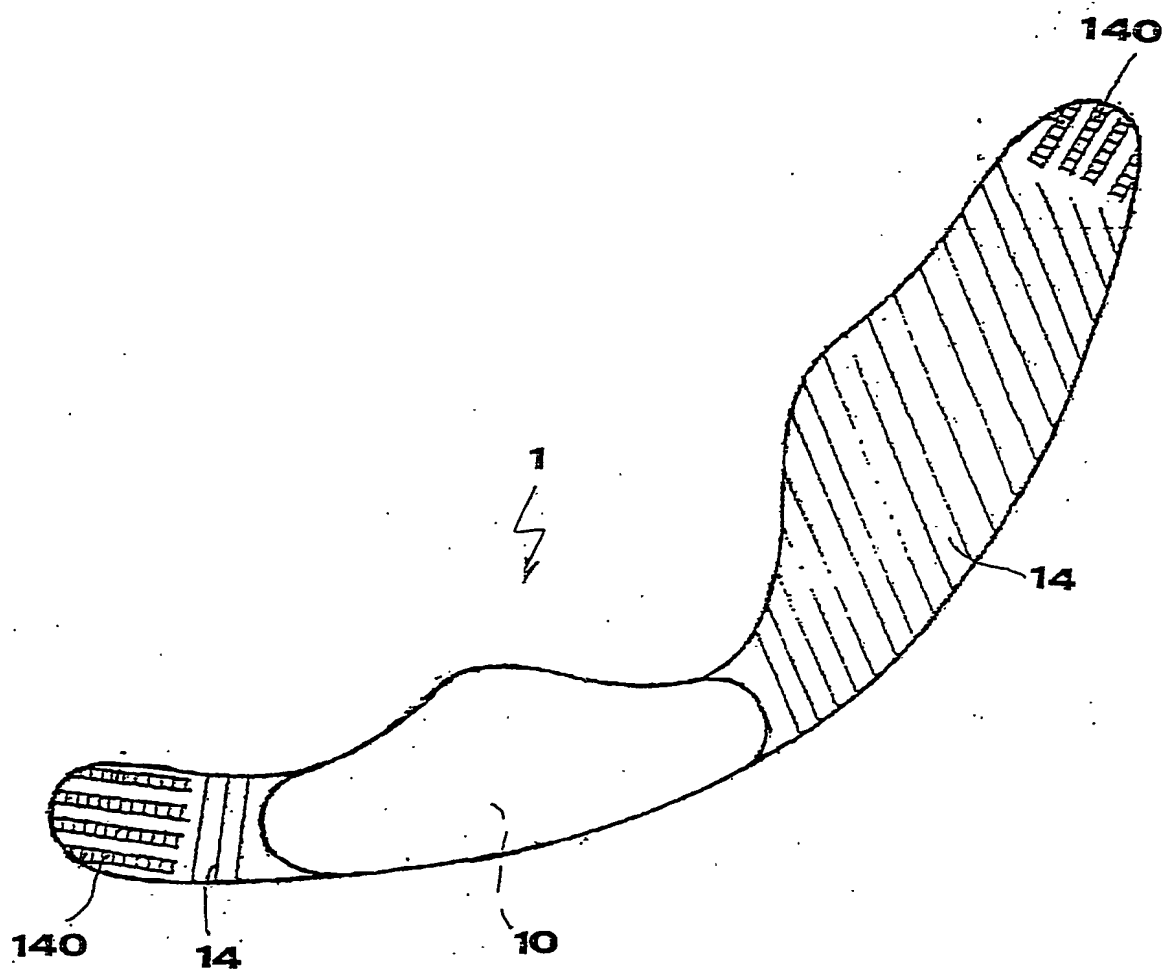


Fig. 2

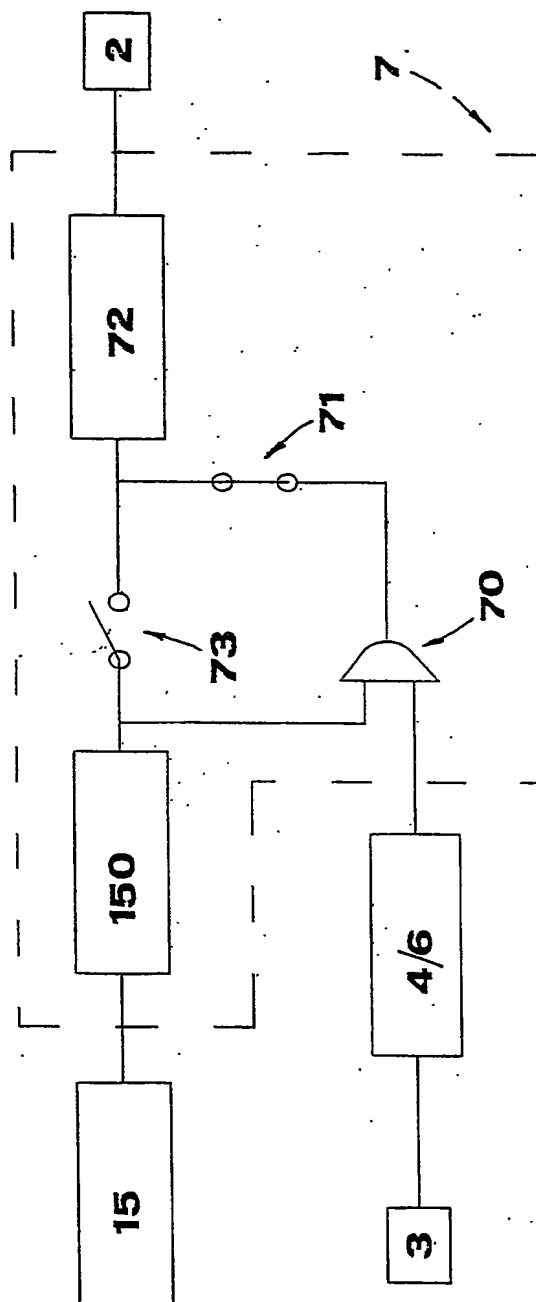


Fig. 3

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IT2004/000602

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 A61B5/00 A61B5/0488 A61B17/42

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/193701 A1 (SIMPSON NIGEL ALASTAIR BUIST ET AL) 19 December 2002 (2002-12-19) the whole document	1-5
A	WO 99/19704 A (NOVATRIX, INC) 22 April 1999 (1999-04-22) page 7, line 34 - page 17, line 34	1-5
A	US 5 405 356 A (HAHN ET AL) 11 April 1995 (1995-04-11) the whole document	1-5
A	US 5 373 852 A (HARRISON ET AL) 20 December 1994 (1994-12-20) column 12, line 16 - column 13, line 26; figures 4b,5	1-5

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

1 April 2005

Date of mailing of the international search report

19/04/2005

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Filali, S



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT2004/000602

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002193701 A1	19-12-2002	AU 5440801 A EP 1241984 A1 WO 0145555 A1 GB 2364130 A ,B JP 2003517865 T	03-07-2001 25-09-2002 28-06-2001 16-01-2002 03-06-2003
WO 9919704 A	22-04-1999	AU 9297298 A WO 9919704 A1	03-05-1999 22-04-1999
US 5405356 A	11-04-1995	AT 192306 T AU 673944 B2 AU 7318594 A BR 9406955 A CA 2165556 A1 CZ 9503392 A3 DE 69424285 D1 DE 69424285 T2 DK 707457 T3 EP 0707457 A1 ES 2148338 T3 HU 73084 A2 JP 2000515027 T NO 955343 A PL 320744 A1 PT 707457 T WO 9501130 A1 US 5645563 A US 5871499 A	15-05-2000 28-11-1996 24-01-1995 20-08-1996 12-01-1995 12-03-1997 08-06-2000 01-03-2001 13-11-2000 24-04-1996 16-10-2000 28-06-1996 14-11-2000 29-12-1995 27-10-1997 31-10-2000 12-01-1995 08-07-1997 16-02-1999
US 5373852 A	20-12-1994	NONE	

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**